


Strap Nail

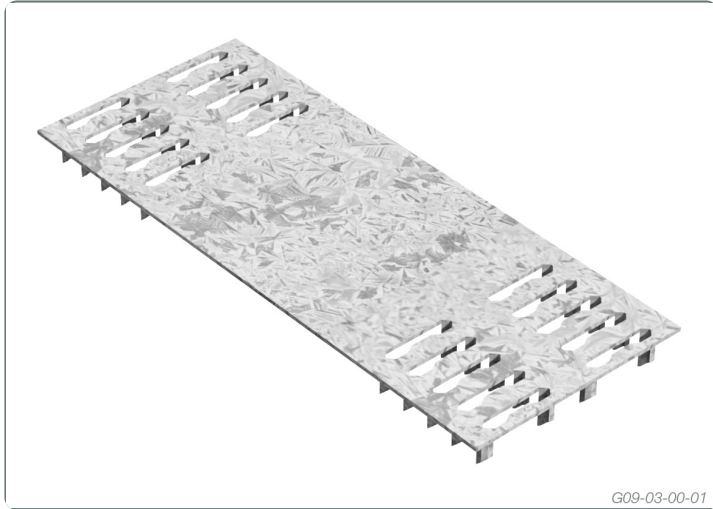

Multipurpose timber connector for joining timber with timber
Providing a quick heavy duty fixing.

These pre-punched and formed galvanised steel timber connectors are ideal for:

Joining timber side by side and for butting timber members together.

Formwork, house frames and joining wall frames at top plate level.

Fast construction joining of timber frames using hammer.

TYPICAL APPLICATIONS

Strap Nail are ideal for home construction, extensions, garages and agricultural constructions. Strap Nail can be hammered to top of frame, allowing flexibility on-site.



LIMIT STATE DESIGN LOADS:


NOTE: The capacities are derived from AS1720-2010 and are for uplift in houses where failure is unlikely to affect an area greater than 25m². For primary elements in structures other than houses or elements in a house for which failure would be greater than 25m² these capacities must be multiplied by 0.94. For primary joints in essential services or post disaster buildings multiply by 0.88.

Load Case	Limit State Design Capacity (kN) for all sizes in the range					
	J2	J3	J4	JD3	JD4	JD5
Dead Load	1.6	1.2	0.8	1.6	1.2	0.9
Dead Load + Wind Load	3.3	2.4	1.7	3.3	2.4	1.9

DESCRIPTION AND PACKAGING

Manufactured from 1mm Galvanised G300 Z275 Steel

Description	Product Code	Reference Code	Carton quantity	Carton kg.
100 x 50	TA060	SN100050	300	13.2
125 x 50	TA064	SN125050	200	11.0
150 x 50	TA066	SN150050	200	13.2
125 x 50 Perforated	TA084	SNP125050	200	11.0
100 x 50 Bulk Bin	SN10050-P	SN10050-P	10000	440

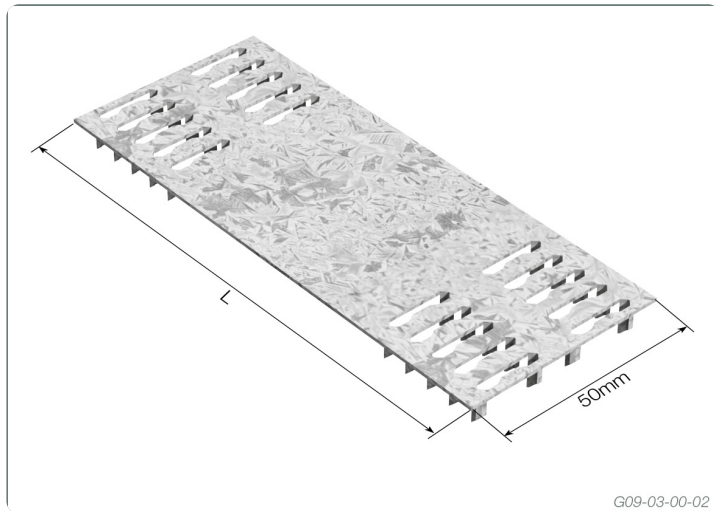

Due to continual product improvement Multinail Australia Pty Ltd. reserves the right to change the product/s depicted - both in description and specification. This document has to be read in conjunction with Multinail's Technical Manual.